



SCAN ME


NEW

LIQUID TATTLE LITE[™]

**SPECIFICALLY DESIGNED FOR:
LIQUID FERTILIZER, WATER, DIESEL EXHAUST FLUID,
WASTEWATER, LUBRICANTS AND CHEMICALS**

FEATURES

- ▶ Remotely access the system 24/7 on multiple devices, anytime, from anywhere
- ▶ All assets, in real-time, on one map. With route planning, reports, and update intervals
- ▶ Unlimited user and permission access
- ▶ Notifications sent via text or email alerting tank level percentage

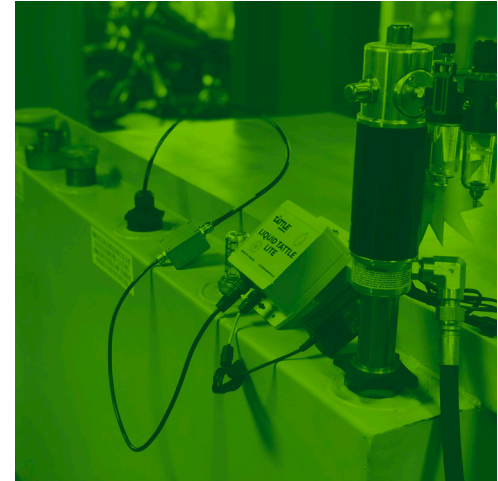

BENEFITS

Fully utilizing all of the features that Tattle Systems[®] has to offer results in proactive insights and informed business decisions that contribute to your businesses bottom line.

- Proven 25% reduction in logistics costs
- Improve client experience
- Real-time remote access
- Asset security
- Optimize asset management
- Data generation
- Optimize inventory levels
- Minimize environmental impact
- Optimize employee productivity
- Made in Canada





SCAN ME

NEW

LIQUID TATTLE LITE[™]

**SPECIFICALLY DESIGNED FOR:
LIQUID FERTILIZER, WATER, DIESEL EXHAUST FLUID,
WASTEWATER, LUBRICANTS AND CHEMICALS**



DEVICE SPECIFICATIONS

DIMENSIONS	119.38mm x 119.38mm x 60.96mm (4.7" x 4.7" x 2.4")
DEVICE MOUNTING	Brackets
WEIGHT	0.54kg (1.2lb)
POWER	External 7.5 V or 12V, Internal back-up 6V Alkaline Battery
WIRE INTERFACE	9-pin (external sensor)
CONNECTIVITY	Cellular LTE, LTE-M
OPERATING TEMPERATURE	-40C to +60C
ALTITUDE	Up to 2000m
OPERATING HUMIDITY RANGE	Maximum relative humidity 80% for temperatures up to 31C decreasing linearly to 50% relative humidity at 40C
STORAGE TEMPERATURE	-40C to +65C
IP RATING	IP68 (Dust tight, no ingress of dust. Watertight against the effect of immersion in water under pressure for long periods)
CERTIFICATIONS	This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept that may cause undesired operation. FCC ID: XMR201807EG-91NA IC: 10224A-2018EG91NA and FCC ID:XMR-201910BG95M3 IC: 10224A-2019BG95M3

SENSOR SPECIFICATIONS

SENSOR HOUSING	Stainless steel
SENSOR DIMENSIONS	L=6" (166mm) D=1" (27mm)
EXTERNAL INSTALL	½" NPT
PRESSURE RANGE	0...50 PSI
SENSOR CABLE LENGTH	33ft (10m) or 100ft (30m)
AIRBOX CERTIFICATIONS	cULus, NEMA Type 4, 4x, 6, 6P
AIRBOX DIMENSIONS	3" (75mm) x 3 1/8" (80mm) x 2" (52mm)
AIRBOX TO TATTLE CABLE	3ft (1m)
CONNECTION	9-pin male plug